

# nifty



# HR12 4x4

**SELF PROPELLED  
ACCESS PLATFORM**



**12.20m (40ft)**  
Working height

**6.10m (20ft)**  
Working outreach

### **Telescopic Upper Boom**

Greater accuracy when  
positioning platform

### **Bi-Energy Available**

Optimising Utilisation

### **Weight Under 3.4 Tonnes**

Low cost transportation

### **Fully Proportional Hydraulic Controls**

Simple, reliable &  
easy to maintain

### **Slide-Out Canopy**

Faster, easier access to engine



**niftylift.com**






# nifty

## Height Rider 12 4x4

With its compact dimensions and class-leading working envelope, the Height Rider 12 has always been versatile and reliable, but add to this a low weight chassis and a powerful 4-Wheel-Drive system and you've got the **Height Rider 12 4x4** - one of the most complete 12m (40ft) work platforms available. Its telescopic upper boom provides increased accuracy when positioning the platform and Nifty's trade-mark 'Bi-Energy' option allows the **HR12 4x4** to work in a wide range of environments.

### SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- CE Mark

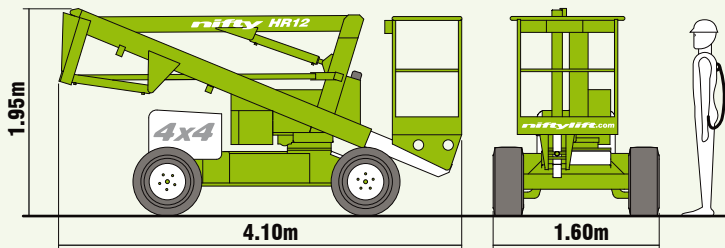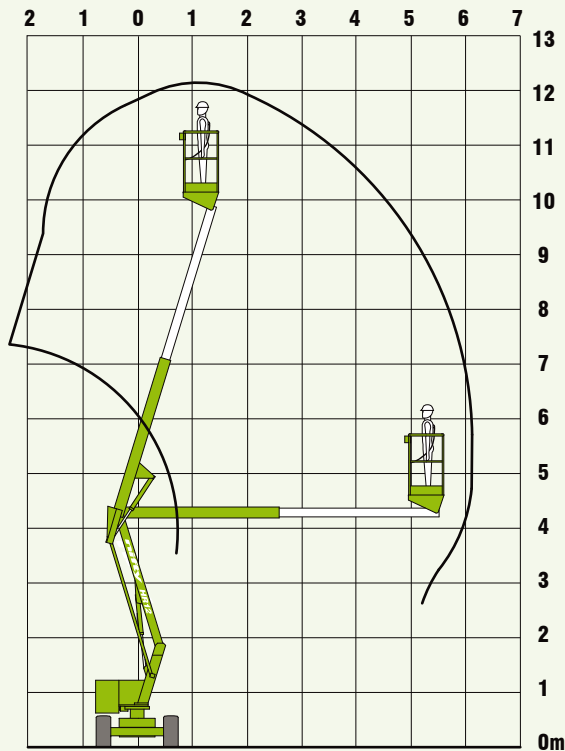

Articulating booms and 6.10m outreach make the **HR12 4x4** perfect for reaching up and over all kinds of obstacles.



The **HR12 4x4's** deep tread rough terrain tyres provide extra grip even on soft ground.

### SPECIFICATIONS

<b>Working Height</b>	12.20m	40ft
<b>Platform Height</b>	10.20m	33ft 6in
<b>Working Outreach</b>	6.10m	20ft
<b>Slew</b>	360°	
<b>Width</b>	1.60m	5ft 3in
<b>Height</b>	1.95m	6ft 5in
<b>Length</b>	4.10m	13ft 5in
<b>Minimum Weight</b>	3,330kg*	7,350lbs*
<b>Turning Radius - Inside</b>	1.80m	5ft 11in
<b>- Outside</b>	3.40m	11ft 2in
<b>Platform Capacity</b>	200kg	440lbs
<b>Platform Size</b>	1.10m x 0.65m	3ft 7in x 2ft 2in
<b>Drive Speed</b>	2.2mph	3.7 kph
<b>Gradeability</b>	30%	
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power Options</b>	Battery Only	
	Diesel Only	
	Bi-Energy (Engine & Battery)	

\* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

**Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.**

**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England  
www.niftylift.com  
e.mail: info@niftylift.com  
Tel.: +44 (0)1908 223456  
Fax.: +44 (0)1908 312733

