

# Specifications

**MODEL** **GS™-3384 RT**

MEASUREMENTS	Metric	US
Working height maximum*	12.06 m	39 ft
<b>A</b> Platform height maximum	10.06 m	33 ft
<b>B</b> Platform height - stowed**	1.55 m	5 ft 1 in
<b>C</b> Platform length - standard	3.94 m	12 ft 11.25 in
outside extended - single deck	5.34 m	17 ft 6.25 in
outside extended - dual deck	6.57 m	21 ft 6.5 in
outside extended - super deck	7.38 m	24 ft 2.5 in
<b>D</b> Slide-out platform extension deck - front	1.52 m	5 ft
<b>E</b> Slide-out platform extension deck - rear	1.22 m	4 ft
<b>F</b> Platform width - outside	1.83 m	6 ft
<b>G</b> Height - stowed: folding guardrails	2.68 m	8 ft 9.5 in
rails lowered	2 m	6 ft 6.75 in
<b>H</b> Length - stowed: single deck	3.94 m	12 ft 11.25 in
dual deck	3.98 m	13 ft 5 in
super deck	4.81 m	15 ft 9.5 in
with outriggers	4.88 m	16 ft
<b>I</b> Width	2.13 m	7 ft
<b>J</b> Wheelbase	2.84 m	9 ft 4 in
<b>K</b> Ground clearance - centre	33 cm	13 in

**PRODUCTIVITY**

Max platform occupancy	7	7
Lift capacity	1,134 kg	2,500 lbs
Drive height		Full height
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph
Gradeability - stowed***	50%	50%
Maximum outrigger levelling****	7° (front to back) / 12° (side to side)	
Turning radius - inside	3.09 m	10 ft 1.5 in
Turning radius - outside	5.94 m	19 ft 6 in
Raise/lower speed	45/29 sec	45/29 sec
Controls	proportional	proportional
Drive	four wheel	four wheel
Tyres - foam-filled rough terrain	25 x 79 cm	10 x 31 in

**POWER**

Power source	Deutz diesel D2011L03i 49 hp (36 kW), air cooled Ford DSG-423 75 hp petrol/LPG (56 kW) water cooled	
Auxiliary power unit	12 V DC	12 V DC
Fuel tank capacity	113.6 L	30 gal
Hydraulic system capacity	113.6 L	30 gal


**SOUND & VIBRATION LEVELS**

Sound pressure level (ground workstation)	88 dBA	88 dBA
Sound pressure level (platform workstation)	78 dBA	78 dBA
Vibration	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>

**WEIGHT\*\*\*\*\***

CE base machine	5,445 kg	12,002 lbs
The basic unit has the single extension deck, diesel motor, no outriggers (except standard on GS-5390RT), foam-filled or non-marking tyres, CE link guard and CE load sense.		
Unit weight modifiers for options		
Outriggers	add 760 kg	1,675 lbs
Dual extension decks	add 356 kg	784 lbs
Super deck	add 411 kg	906 lbs
Generator/Inverter	add 48 kg	105 lbs

**STANDARDS COMPLIANCE** CE EN280, PB-10-611-03

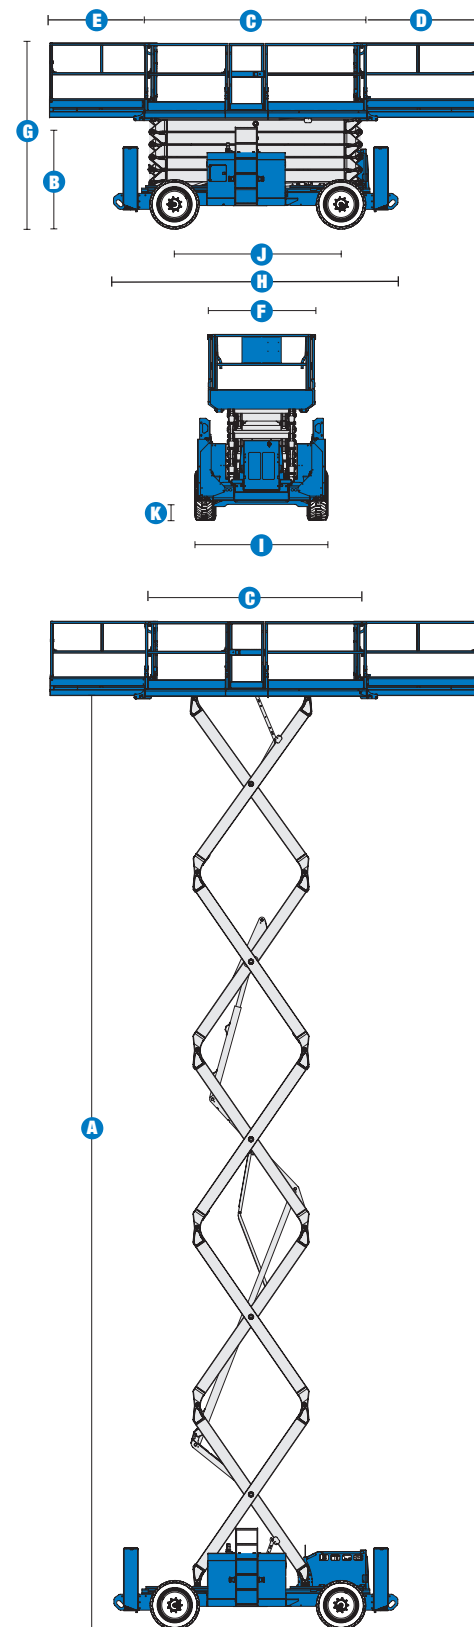

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Based on RT tyres. Deduct 2 in (5.08 cm) and non-marking.

\*\*\* Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.

\*\*\*\* Outriggers are optional

\*\*\*\*\* Weight will vary depending on options and/or country standards.

## Features

### STANDARD FEATURES

#### MEASUREMENTS

- 12.06 m (39 ft) working height
- Up to 1,134 kg (2,500 lb) lift capacity

#### PRODUCTIVITY

- 3.94 x 1.83 m (12 ft 11.25 in x 6 ft) steel frame platform
- 1.52 m (5 ft) extension deck
- Replaceable aluminium deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full-height swing gate
- Two self-closing gates
- 4x4
- Positive traction control
- Four-wheel dynamic braking
- Slide-out engine tray
- Foam-filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Certified load sensor

#### POWER

- Deutz diesel 49 hp (36 kW)
- Ford Petrol/LPG 75 hp (56 kW)
- Hydraulic oil cooler



### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Power to platform (plug, socket and ground fault interrupt earth leakage on request)
- Dual slide-out platform extension deck package 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- 7.30 m (24 ft) super deck extension package
- Automatic levelling hydraulic outriggers
- Air line to platform
- Non-marking, foam filled, rough terrain tyres
- Dual flashing beacons
- Platform work lights\*
- Motion alarm
- Biodegradable oil

#### POWER

- 3000 AC watt generator
- Diesel catalic scrubber muffler
- Engine heater
- LPG steel tank only, 33.5 lb (15 kg) capacity
- Soot filter
- Refinery kit (spark arrestor + electric Chalwyn valve)

\*Available aftermarket only

#### Enquiries from Europe:

Tel: +31 165 519 361  
 Fax: +31 165 511 148  
 Email: AWP-InfoEurope@terex.com

#### Offices:

##### France

Tel: +33 (0)2 37 26 09 99  
 Fax: +33 (0)2 37 26 09 98

##### Germany

Tel: +49 (0)4221 491 810  
 Fax: +49 (0)4221 491 820

##### Spain

Tel: +34 93 572 50 90  
 Fax: +34 93 572 50 91

##### Scandinavia

Tel: +46 31 57 51 00  
 Fax: +46 31 57 51 04

##### The Netherlands

Tel: +31 165 519 361  
 Fax: +31 165 511 148

##### UK

The Maltings  
 Wharf Road  
 Grantham NG31 6BH  
 UK  
 Tel: +44 (0)1476 584333  
 Fax: +44 (0)1476 584334

##### Middle East

Tel: +971 4 399 0381  
 Fax: +971 4 399 0382  
 Email: AWP.Infome@terex.com

##### Russia & CIS countries

Tel: +7 495 660 32 30  
 Fax: +7 495 660 32 29  
 Email: info@terexrus.ru

#### Corporate Headquarters:

##### United States

18340 NE 76th Street  
 P.O. Box 97030  
 Redmond, WA  
 USA 98073-9730  
 Tel: +1 425 881-1800  
 Fax: +1 425 883-3475

#### Distributed By: